



48W LED Explosion Proof Light


12V or 120V LED Floodlighting

- High Quality Light
- Tough, Solid, Designed To Last
- UL Validated For Portable Use
- UL 844-P4

Model # FS48LED-EXP-120V

Specifications

- Class I, Division I, Groups B, C and D - T4A
- Class I, Division 2, Groups A, B, C and D - T4A or T5
- Class 2, Division 1 & 2, Group E, F, and G

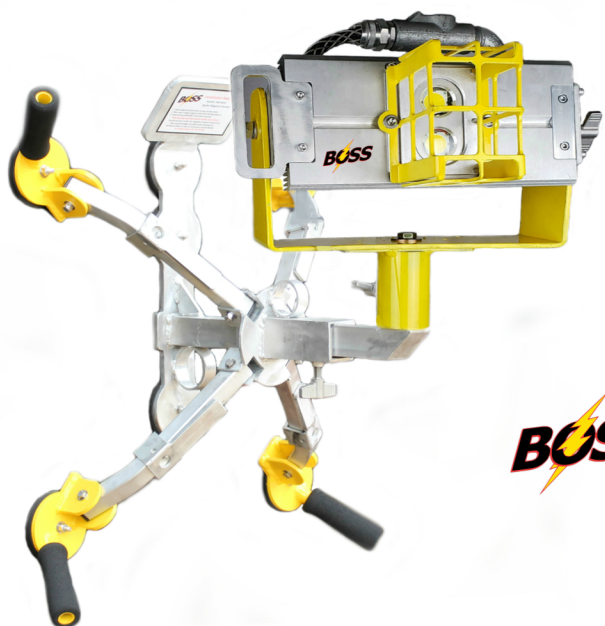

Voltage	12V - 120V Optional
Watts	48
Total Lumens	7200
Light Projection	75 Feet
Cord Length	100'
Operating Temperature	-55°C to +60°C
CCT - Light Color	5000k
Weight	31lbs
Dimensions	H 4.7" , W 6.65" , L 12"

* Shown on spider
magnet mount
#SMB-AL

Universal Applications

Refineries, Petrochemical, Steel Mills, Grain Silos, Sugar Mills,
Offshore Marine, and other Hazardous Dust Location facilities.

Also Available In The Following Mounting Options



Scaffold Clamp
#SC-AL



Floor Stand
#FS-AL



Pipe Clamp
#PC4-AL



Magnet Mount
#MM-AL



Cart Mount
#CM-AL



Quadpod
#QP8-AL